

MD800 - Compact AC MultiDrive


Comprehensive functionality in a compact footprint



- Modular design (from 1 to 8 drives)
- 1/3 ph 200 V and 3 ph 400 V supply
- Drive ratings: 200 W to 11 kW
- STO SIL3
- Choice of fieldbus protocols available



reddot winner 2021
innovative product

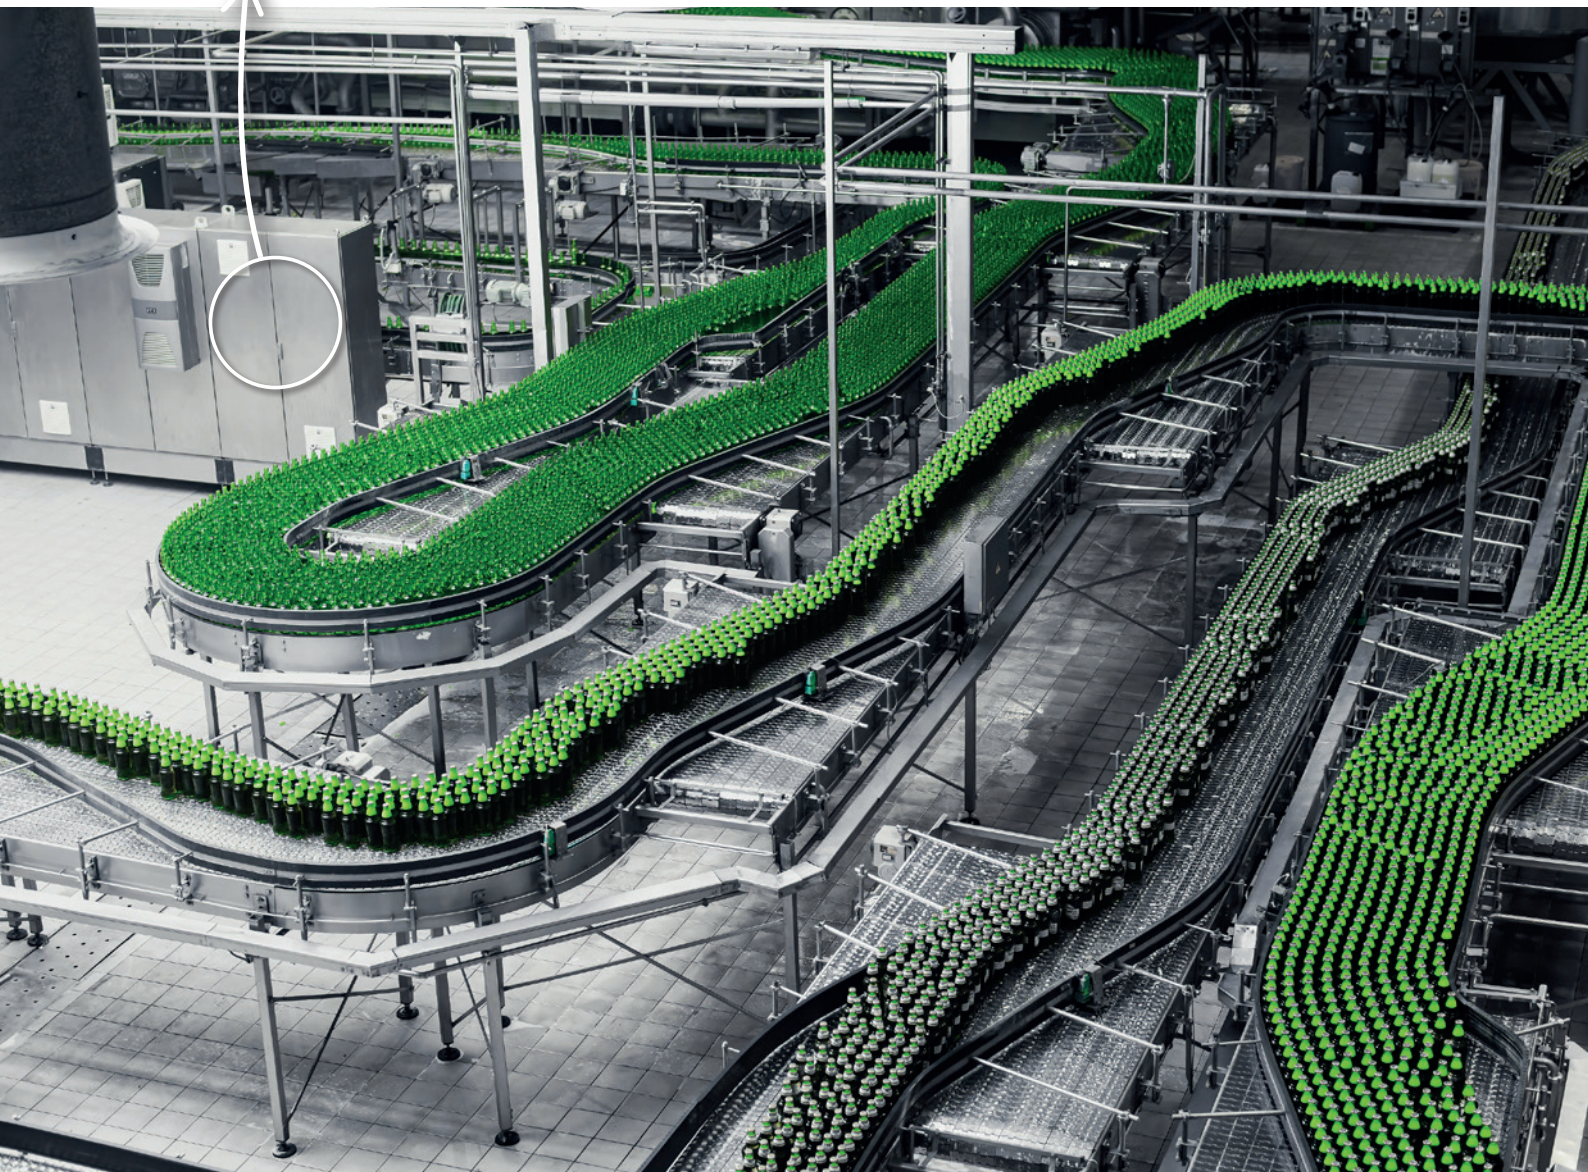

MD800 – features & functions

Comprehensive functionality:

- Individual STO SIL 3 for each drive
- Suitable for open loop asynchronous & PM synchronous motors
- +24 VDC control backup supply
- IP40 rated
- Remote LCD keypad (optional)
- Commissioning PC software available
- Dual rated: heavy duty (HD, G rating): 150% overload; normal duty (ND, P rating): 110% overload

High level, flexible connectivity:

- Built-in I/Os: 4 DI, 4 DI/DO, 2 AI, 1 RO
- Standard onboard communications: USB commissioning port, CAN, RS485



- Two expansion slots
 - I/O expansion cards
 - Fieldbus option cards:



Reduced installation costs

- User-friendly pluggable connectors (spring type)
- Faster build time
- Reduced wiring
- User-friendly pluggable connectors (spring type)
- Fewer external components:
 - > Common EMC filter (C2 compliant)
 - > Input reactor
 - > Fuses/MCCBs
 - > Common built-in dynamic braking (variant)

Compact footprint for smaller cabinets


- Common height and depth: 182 mm x 160 mm
- Rectifier width: 99.5 mm
- Drive width: 49.5 mm

Designed for durability:

- High level conformal coating (3C3 & 3S2)
- Operating temp range: -20 to +60°C (de-rating > 50°C)
- Operating altitude: up to 4,000 m (de-rating > 1,000 m)
- Separate cooling channel for heatsink

This image is illustrated in its actual size: W 300 mm x H 182 mm

* In development

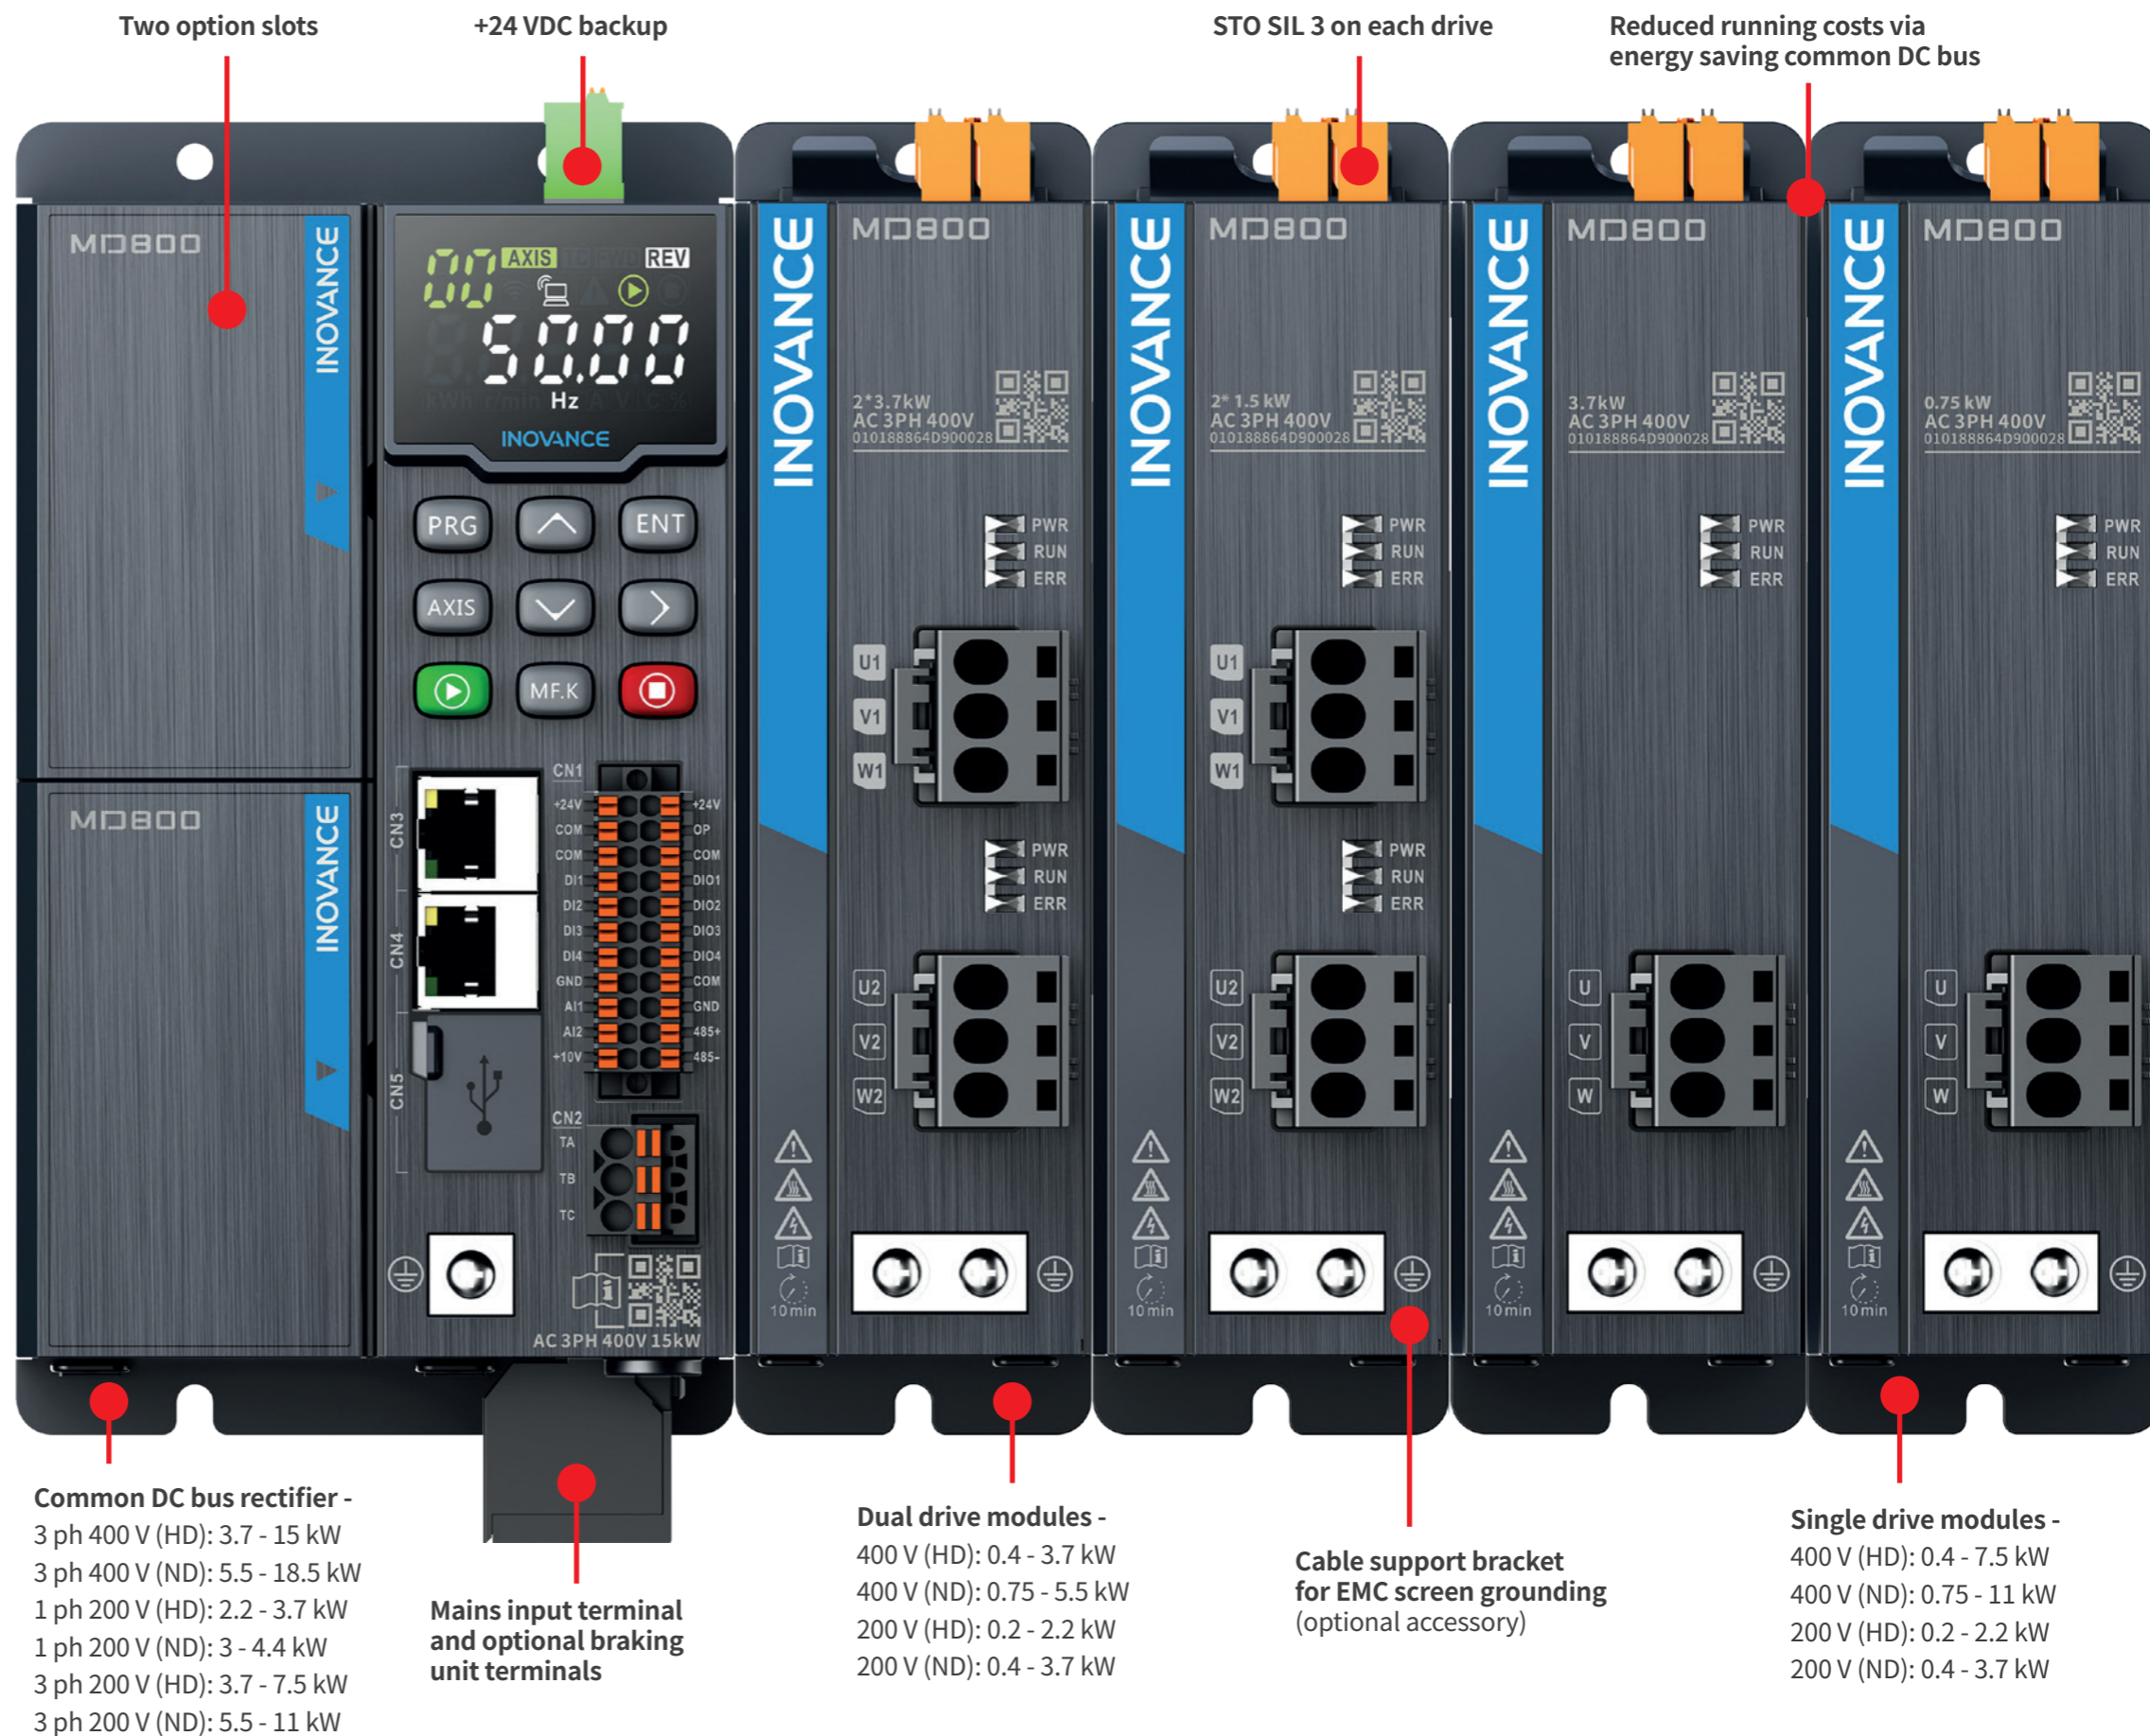

Common DC bus rectifier -
 3 ph 400 V (HD): 3.7 - 15 kW
 3 ph 400 V (ND): 5.5 - 18.5 kW
 1 ph 200 V (HD): 2.2 - 3.7 kW
 1 ph 200 V (ND): 3 - 4.4 kW
 3 ph 200 V (HD): 3.7 - 7.5 kW
 3 ph 200 V (ND): 5.5 - 11 kW

Mains input terminal and optional braking unit terminals

Dual drive modules -
 400 V (HD): 0.4 - 3.7 kW
 400 V (ND): 0.75 - 5.5 kW
 200 V (HD): 0.2 - 2.2 kW
 200 V (ND): 0.4 - 3.7 kW


Cable support bracket for EMC screen grounding
 (optional accessory)

Single drive modules -
 400 V (HD): 0.4 - 7.5 kW
 400 V (ND): 0.75 - 11 kW
 200 V (HD): 0.2 - 2.2 kW
 200 V (ND): 0.4 - 3.7 kW




Designed for cabinet space saving - reduced installation costs

Eight Inovance MD200 drives, each module's footprint is: W 75 mm x H 180 mm

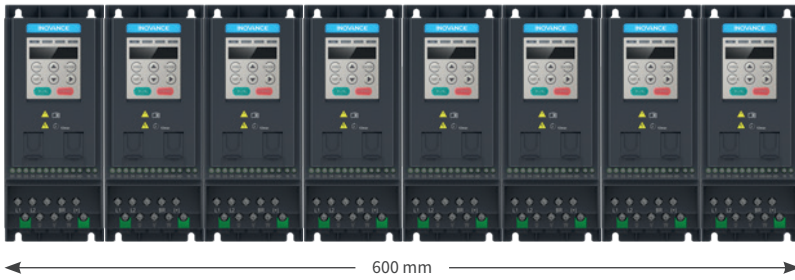

Footprint reduction
-50%

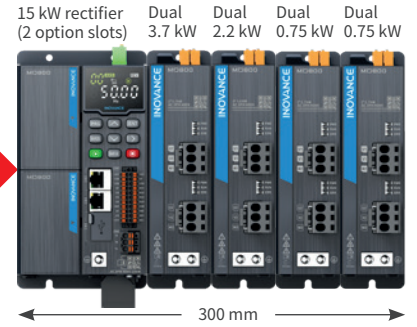

Single drive units

Power (kW)		Part number	Model	Output AC current (A)		STO function	
HD	ND			HD	ND		
400 V, DC supply voltage: 510-720 VDC							
0.4	0.75	0101B470	MD800-1-4T1R8	1.8	2.1	No	
0.75	1.5	01019513	MD800-1-4T3R4	3.4	4.6		
1.5	2.2	0101B471	MD800-1-4T4R8	4.8	5.4		
2.2	3.7	01019514	MD800-1-4T5R5	5.5	9		
3.7	5.5	0101B472	MD800-1-4T9R5	9.5	13		
5.5	7.5	01019512	MD800-1-4T13	13	17		
7.5	11	01019506	MD800-1-4T17	17	21	Yes	
0.4	0.75	0101B582	MD800-1-4T1R8S	1.8	2.1		
0.75	1.5	0101B583	MD800-1-4T3R4S	3.4	4.6		
1.5	2.2	0101B586	MD800-1-4T4R8S	4.8	5.4		
2.2	3.7	0101B587	MD800-1-4T5R5S	5.5	9		
3.7	5.5	0101B590	MD800-1-4T9R5S	9.5	13		
5.5	7.5	0101B591	MD800-1-4T13S	13	17		
7.5	11	0101B555	MD800-1-4T17S	17	21		
200 V, DC supply voltage: 270-360 VDC							
0.2	0.4	0101BA93	MD800-1-2T1R7	1.7	1.9		No
0.4	0.75	0101BA92	MD800-1-2T3	3	3.5		
0.75	1.5	0101BA91	MD800-1-2T5	5	8		
1.5	2.2	0101BA89	MD800-1-2T8	8	9.6		
2.2	3.7	0101BA88	MD800-1-2T11	11	17.6		
0.2	0.4	0101BD16	MD800-1-2T1R7S	1.7	1.9	Yes	
0.4	0.75	0101BA90	MD800-1-2T3S	3	3.5		
0.75	1.5	0101B584	MD800-1-2T5S	5	8		
1.5	2.2	0101BD17	MD800-1-2T8S	8	9.6		
2.2	3.7	0101BA94	MD800-1-2T11S	11	17.6		

Accessories

Part number	Model	Description
01040124	IO-M1	I/O expansion card: 8 DI, 8 DO, 2 AI
01040123	IO-R1	Relay expansion card: 8 relays with normally open contact
01040122	IO-R2	Relay expansion card: 4 relays with changeover contact
01040121	SI-PN	PROFINET communication card
01040120	SI-ECAT	EtherCAT communication card
01040238	SI-EN	Ethernet/IP communication card
In development	SI-EM	Modbus TCP communication card
01040028/20	SOP-20	Remote LCD keypad (inc. 3 m cable)
01040175	MD800-PBJ100M-W1	Rectifier unit cable support bracket
01040176	MD800-PBJ50M-W1	Single or dual drive unit cable support bracket
01040169	MD800-AZB1	Mounting plate for easy assembly of an MD800 set in the electrical panel

*3 ph input reactors available on request (3-4% impedance)

For more information, please contact our local offices.

International Offices

Germany-Stuttgart
Tel: +49 (0) 7144 8990
sales.de@inovance.eu

Spain-Barcelona
Tel: +34 93 504 94 48
sales.es@inovance.eu

India
Head Office Chennai Tel: +91 (0) 44 4380 0201

Ahmedabad Tel: +91 (0) 79 4003 4274

Mumbai Tel: +91 (0) 22 4971 5883

New Delhi Tel: +91 (0) 11 4165 4524

Sales Network in Kolkata, Bengaluru, Pune, Coimbatore, Hyderabad, Vadodara, Jaipur
info@inovance.ind.in

Italy-Milano
Tel: +39 (0) 2268 22318
sales.it@inovance.eu

Turkey-Istanbul
Tel: +90 (216) 706 17 89
sales.tr@inovance.eu

France-Bordeaux
Tel: +33 (0) 5594 01050
sales.fr@inovance.eu

South Korea-Seoul
Tel: +82 2 3489 8850
sales.kr@inovance.eu

Hong Kong SAR
International Export Office
Tel: +852 2751 6080
info@inovance.eu

For other country distributors, contact the Hong Kong office.

Inovance Technology Companies
Shenzhen Inovance Technology Co. Ltd.
Suzhou Inovance Technology Co. Ltd.

INOVANCE
www.inovance.eu

Dual drive units

Power (kW)		Part number	Model	Output AC current (A)		STO function	
HD	ND			HD	ND		
400 V, DC supply voltage: 510-720 VDC							
0.4	0.75	0101B469	MD800-2-4T1R8	1.8	2.1	No	
0.75	1.5	01019509	MD800-2-4T3R4	3.4	4.6		
1.5	2.2	0101AK33	MD800-2-4T4R8	4.8	5.4		
2.2	3.7	01019510	MD800-2-4T5R5	5.5	9		
3.7	5.5	01019511	MD800-2-4T9R5	9.5	13		
5.5	7.5	01019512	MD800-2-4T13	13	17		
7.5	11	01019506	MD800-2-4T17	17	21	Yes	
0.4	0.75	0101B576	MD800-2-4T1R8S	1.8	2.1		
0.75	1.5	0101B577	MD800-2-4T3R4S	3.4	4.6		
1.5	2.2	0101B579	MD800-2-4T4R8S	4.8	5.4		
2.2	3.7	0101B580	MD800-2-4T5R5S	5.5	9		
3.7	5.5	0101B554	MD800-2-4T9R5S	9.5	13		
200 V, DC supply voltage: 270-360 VDC							
0.2	0.4	0101BA86	MD800-2-2T1R7	1.7	1.9		No
0.4	0.75	0101BA85	MD800-2-2T3	3	3.5		
0.75	1.5	0101BA84	MD800-2-2T5	5	8		
1.5	2.2	0101BA79	MD800-2-2T8	8	9.6		
2.2	3.7	0101BA80	MD800-2-2T11	11	17.6		
0.2	0.4	0101BA83	MD800-2-2T1R7S	1.7	1.9	Yes	
0.4	0.75	0101B585	MD800-2-2T3S	3	3.5		
0.75	1.5	0101BD18	MD800-2-2T5S	5	8		
1.5	2.2	0101BD19	MD800-2-2T8S	8	9.6		
2.2	3.7	0101BA87	MD800-2-2T11S	11	17.6		

Rectifier units

Power (kW)		Part number	Model	Built-in dynamic braking
HD	ND			
3 ph 400 VAC input				
3.7	5.5	0101B573	MD800-0-4T12	No
7.5	11	0101B572	MD800-0-4T22	
15	18.5	0101B571	MD800-0-4T41	
3.7	5.5	0101AK34	MD800-0-4T12B	Yes
7.5	11	01019507	MD800-0-4T22B	
15	18.5	0101AH51	MD800-0-4T41B	
1 ph 200 VAC input				
2.2	3	0101BA52	MD800-0-2S24	No
3.7	4.4	0101B602	MD800-0-2S40	
2.2	3	0101BA53	MD800-0-2S24B	Yes
3.7	4.4	0101B603	MD800-0-2S40B	
3 ph 200 VAC Input				
3.7	5.5	0101C563	MD800-0-2T22B	Yes
7.5	11	0101C562	MD800-0-2T41B	

EMC Filters

Category	Filter model	Matched rectifier model
EMC filters (To achieve C2 level)	FIL800-4T-045	MD800-0-4T12*
		MD800-0-4T22*
		MD800-0-4T41*
		MD800-0-2S24*
		MD800-0-2S40*